

ARPJ-LA301050 (31W, 1050mA)

Application


- Constant current mode power supply
- Universal AC input / Full range
- Fully encapsulated with IP65 level
- Protections: Short circuit / Over current
- Small and compact size
- UL1310 Class 2 power unit, pass LPS
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- 2 years warranty



Specification

OUTPUT	DC VOLTAGE	30V
	DC VOLTAGE RANGE	9-30V
	CURRENT RANGE	1050mA \pm 3%
	RATED POWER	31.5W
	RIPPLE & NOISE (max.)	200mVp-p
	VOLTAGE TOLERANCE	\pm 3.0%
	LINE REGULATION	\pm 1.0%
	LOAD REGULATION	\pm 2.0%
	SETUP, RISE TIME	500ms,250ms/230VAC 500ms,250ms/115ac at full load
	HOLD UP TIME (Typ.)	50ms/200VAC 24ms/100VAC at full load
INPUT	VOLTAGE RANGE	100-240VAC
	FREQUENCY RANGE	47~63Hz
	EFFICIENCY(Typ.)	84% full load
	AC CURRENT(at full load)	0.7A/100VAC 0.35A/240VAC
	INRUSH CURRENT (max.)	COLD STAT 70A/230VAC
	LEAKAGE CURRENT	0.25mA/240VAC
PROTECTION	OVER CURRENT	Above 105% rated output power. Protection type: Hiccup mode, recovers automatically after fault condition is removed.
	OVER TEMPERATURE	Tj 140°C typically(U1) Detect on main control IC
		Protection type: Hiccup mode, recovers automatically after temperature goes down
ENVIRONMENT	WORKING TEMP.	-10°C ~ +50°C
	WORKING HUMIDITY	20°C~90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40°C ~ +80°C, 10°C~95% RH
	TEMP.COEFFICIENT	\pm 0.03%/°C (0°C~50°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X,Y, Zaxes
SAFETY & EMC	SAFETY STANDARDS	Design refer to UL1310 Class 2,TUVEN60950-1, EN61347-2-13, CAN/CSA C22.2 No. 223-M91, meet IP65
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC
	ISOLATION RESISTANCE	I/P-O/P:>100MOhms / 500VDC / 25°C 70%RH
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3
	EMS IMMUNITY	Compliance toEN61000-4-2,3,4,5,6,8,11; ENV50204,EN55024, light industry level , criteria A
	DIMENSION	148*32*28mm (L*W*H)

Mechanical Specification

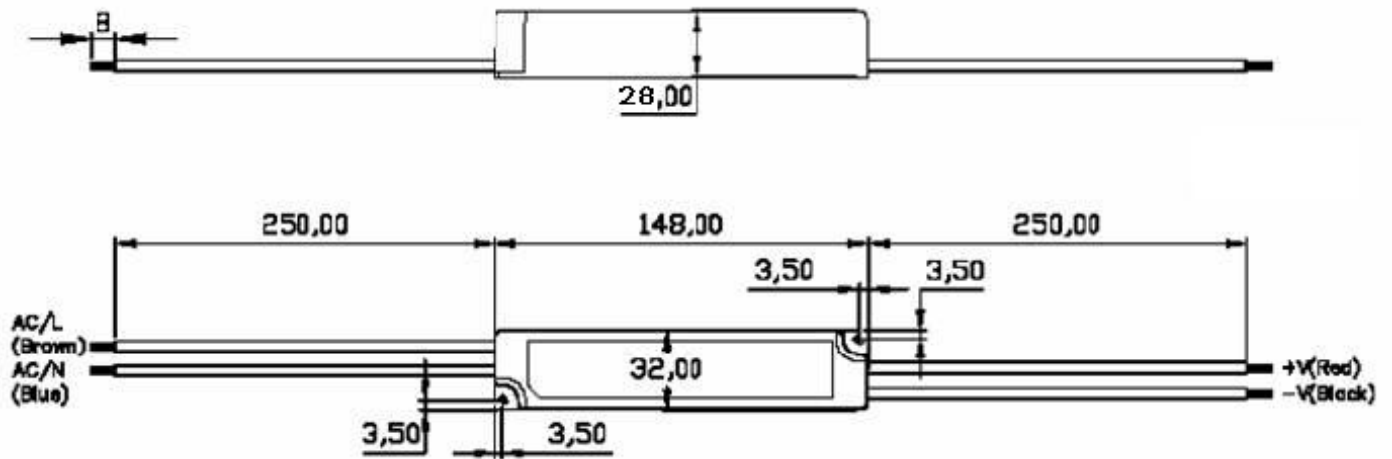

Block Diagram

