


## Панель сенсорная SR-2805T1 (RF-диммер, 2 зоны)

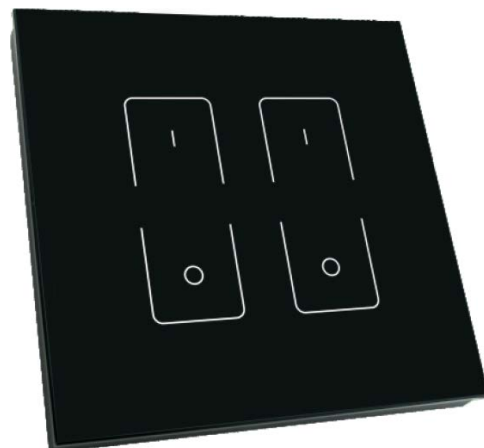

### FEATURE

- This is a RF Wireless full touch wall mounted dimmer Remote 2 zones
- Touch sensitive
- Glass interface
- Back lighting for finding in the dark

### PARAMETERS


#### • Remote

Part No.	Operation Voltage	Output	RF Frequency	Control distance
SR-2805T1	220VAC	RF Wireless Signal	868MHz	About 30m


#### • Receiver

Part No.	Iuput Voltage	Current	Output	Remarks
SR-2501N	12-36VDC	4x5A	4x(60-180)W	Constant voltage
SR-2501NEA	12-36VDC	4x8A	4x(96-288)W	Constant voltage
SR-2502N	12-36VDC	4x350mA	4x(4.2-12.6)W	Constant current
SR-2503N	12-36VDC	4x700mA	4x(8.4-25.2)W	Constant current
SR-2501NS	12-36VDC	1x8A	1x(96-288)W	Constant voltage
SR-2502NS	12-36VDC	1x350mA	1x(4.2-12.6)W	Constant current
SR-2503NS	12-36VDC	1x700mA	1x(8.4-25.2)W	Constant current

### PRODUCT SIZE

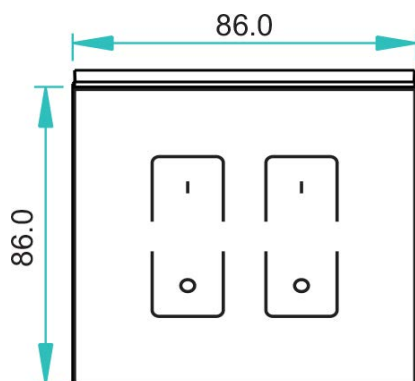


### INSTALLATION

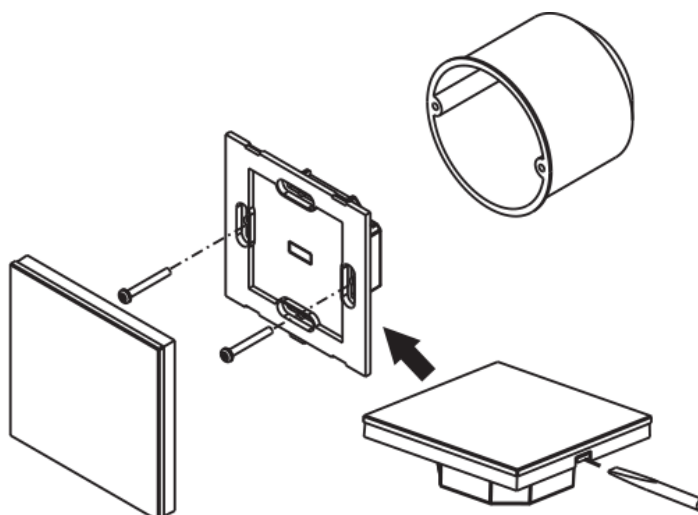


## WIRING DIAGRAM


### • Sender Connection Diagram

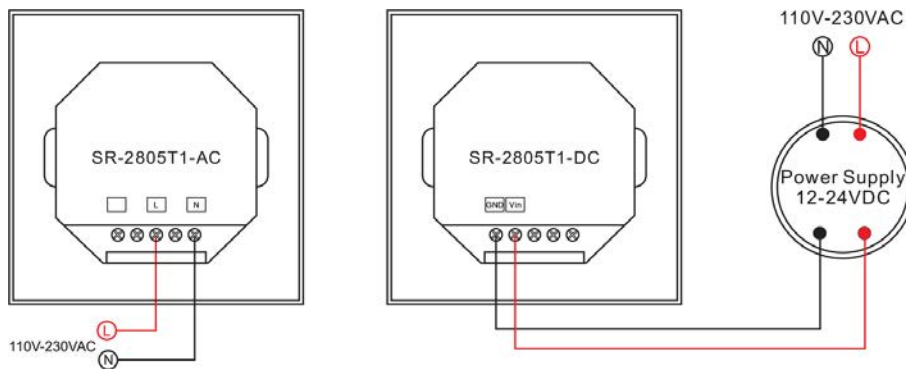

### • Receiver Connection Diagram

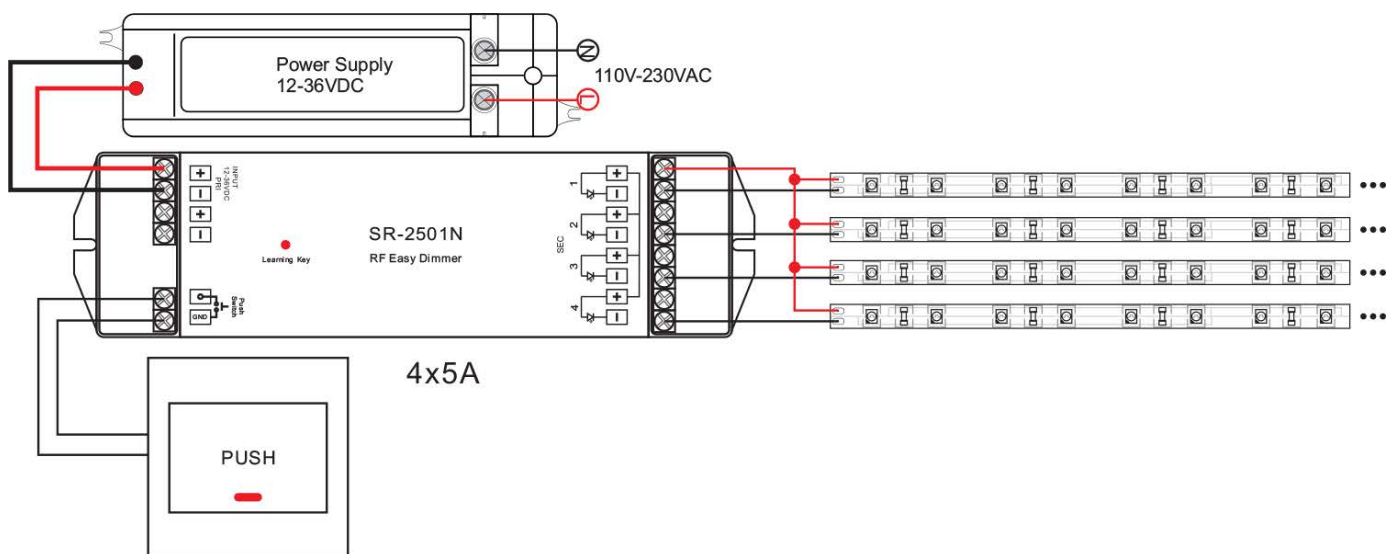

## OPERATION

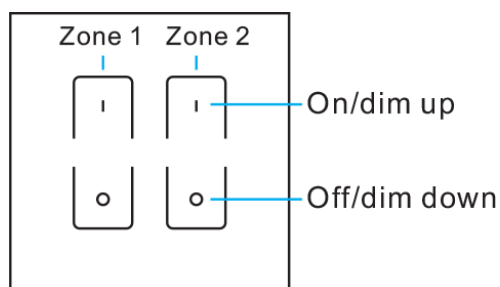

User manual when work with SR-2501/2/3N, SR-2501/2/3NS for single color:

1. Pairing with remote: connect well receiver, short press learning key on receiver, then immediately touch any of "I" to assign the receiver in zone1 or zone2, the led light will flash, means well paired.

2. Short touch "I" fto turn ON the light, long touch it to dim up brightness.

Short touch "O" to turn OFF the light, long touch it to dim

down brightness.

3. If you want delete the receiver's learning data, just long press for 5 seconds the learning key on receiver, the reciever will be deleted the learning, be set as factory defaults.

## SAFETY & WARNINGS

1. The product shall be installed and serviced by a qualified person.
2. IP20.Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
3. Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
4. Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
5. Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
6. Please ensure that the cable is secured tightly in the connector
7. For update information please consult your supplier.