

Диммер SR-EUMA0405

(220V, 4x5A, DALI, DMX, 0-10V)



Catalog

1	Summary	3
1.1	Ordering Information.....	3
2	Product Features	3
3	Technical Parameters	4
3.1	Equipment size(mm)	4
4	Function Show of the product	4
5	LCD function.....	5
5.1	Control Mode	7
5.1.1	EU-BUS mode.....	7
5.1.2	DMX/RDM mode.....	7
5.1.3	DALI mode	7
5.1.4	Manual mode.....	7
5.2	Output mode	8
5.2.1	Channel Set.....	8
5.2.2	Fade Time Set.....	8
5.2.3	Threshold Set.....	8
5.3	Time Event(Only for EUMA0405-DDLT).....	8
5.3.1	All Event	9
5.3.2	Create Event.....	9
5.3.3	Delete Event	10
5.3.4	Event Manage	10
5.4	System Setting.....	10
5.4.1	Time Setting (Only for EUMA0405-DDLT)	10
5.4.2	Factory Reset	10
5.4.3	Backlight.....	10
5.5	System Info.....	11
6	Emergency Switch Function.....	11
7	Wiring Diagram	11
8	Event Case	12

1 Summary

Thanks for using our phase cut controller. The product adopts advanced MOS-FET control technology, can accurately realize the phase cut function, and has no requirement for the type or capacity of load. The compatibility is far superior to leading edge controller.

Control mode of the controller is flexible, which complies with 4 control protocols:


1, support the international widely adopted DMX-512 (1990) /RDM and DALI standard protocol, and can access KNX, Dynalite, Lutron, Crestron, LDS and other intelligent dimming network via gateway.

2, support EU-BUS lighting control protocol. It can be used with relay switch controller, clock module, panel module, sensor module to achieve the group and scene control. This solution is widely used in the family, conference rooms, hotels, schools, and other occasions.

3, support Touchdim, manual control, timing control function (optional).The user can manually turn ON/OFF or dim the brightness.

1.1 Ordering Information

Model	DALI	DMX/RDM	EU-BUS	Manual control	Timer function
EUMA0405-DDL	Y	Y	Y	Y	N
EUMA0405-DDLT	Y	Y	Y	Y	Y

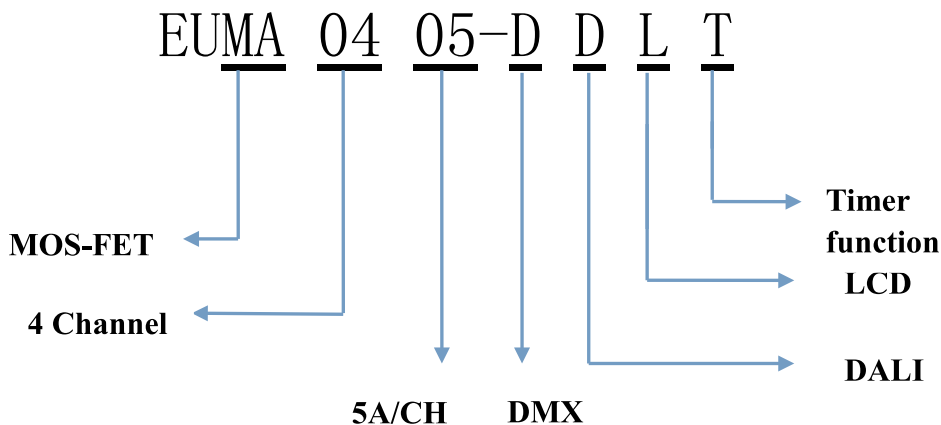


2 Product Features

- Meets DMX512(1990)/RDM, DALI IEC62386 protocol and EU-BUS
- Output 4 channels AC MOSFET phase cut signal and their synchronous DC 0-10V control signal
- 4 AC MOSFET can work as leading edge (LPC) mode, trailing edge(TPC) mode or switch mode
- Maximum output current of AC MOSFET is 5A/ch
- Built-in LCD, the user can operate more conveniently
- Set fades time of each channel separately, range of 0.1-10s
- Each circuit is equipped with emergency switch that control full brightness (100%) output function
- Can save up to 8 events
- Standard 35 mm din rail, convenient installation

3 Technical Parameters

Item	Parameters
Input voltage	100-240VAC
Input control signal	DMX512(1990)/RDM, DALI IEC62386,EU-BUS
Maximum output current of phase cut	5A*4(AC MOSFET, please take 5A*PF as output current limit for each circuit)
Maximum output signal current	20mA*4(for DC0-10V)
The number of events(only for EUMA0405-DDLT)	8
Maximum inrush current limit per channel	100A
Equipment size	222.5*93.4*63.2mm(L*W*H),standard 35mm din rail
Packing size	226*100*68mm(L*W*H)
G.W.	975g
Operational temperature	-20-50°C

3.1 Equipment size(mm)

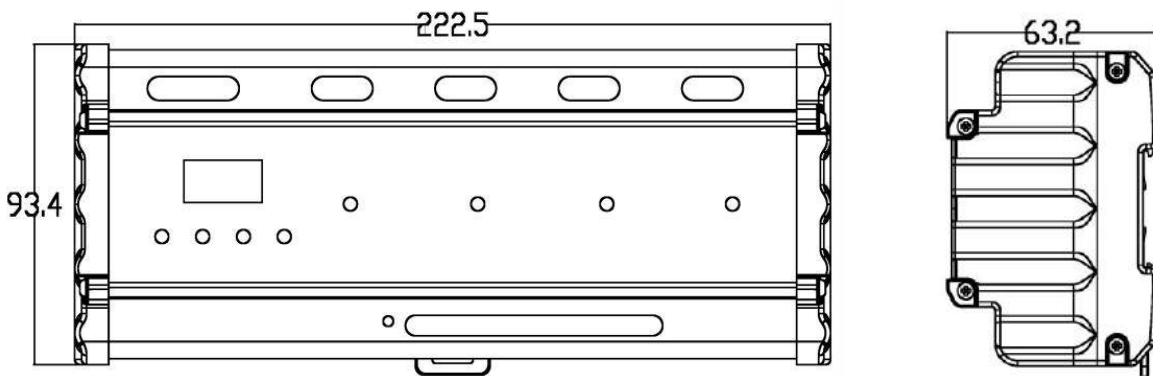

4 Function Show of the product

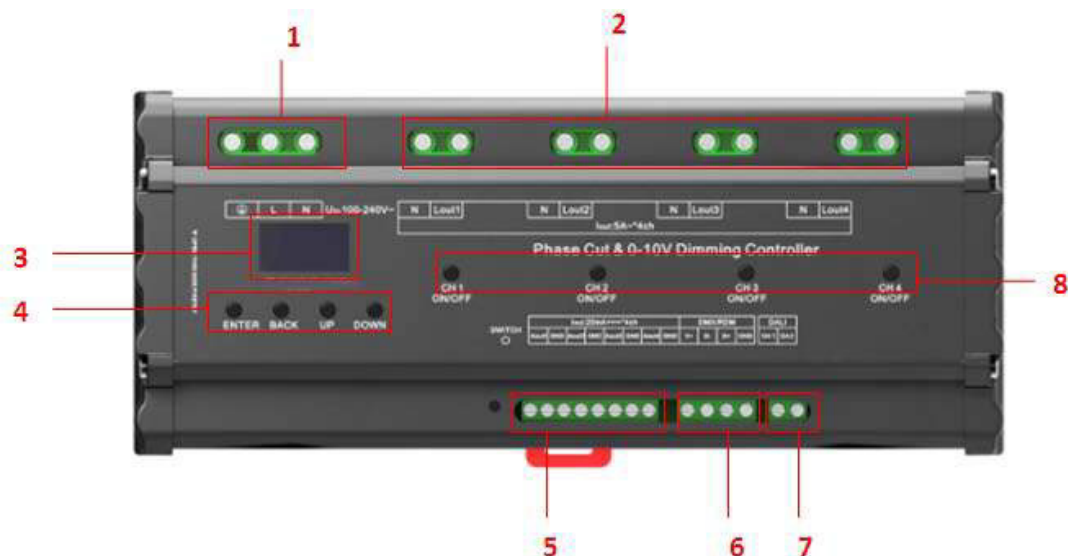


Figure 1

1	AC input port
2	4 AC MOSFET output ports, corresponding with 4 DC 0-10 V ports of 5 from left to right in proper order. For each channel, and the addresses of both AC MOSFET and the corresponding 0-10V are shared.
3	LCD display
4	Function button
5	4 DC analog voltage output ports(0-10V)
6	DMX 512/RDM,EU-BUS signal port(Don't use DMX 512/RDM and EU-BUS protocol simultaneously, they share the same terminals)
7	DALI signal port
8	Emergency switch

5 LCD function

After a successful connection, the menu will be seen in Figure 2. Press the button "ENTER" to enter the sub menu as shown in Figure 3, press "BACK" to return to the upper menu, press "UP" or "DOWN" button to move the cursor up or down.




Figure 2





Figure 3

Button	Function
ENTER	Confirm key, confirm the selected state, enter the option to set the state
BACK	Return key, return to the upper menu, exit the option to set the state
UP	Move up the cursor; change the status of the option
DOWN	Move down the cursor; change the status of the option

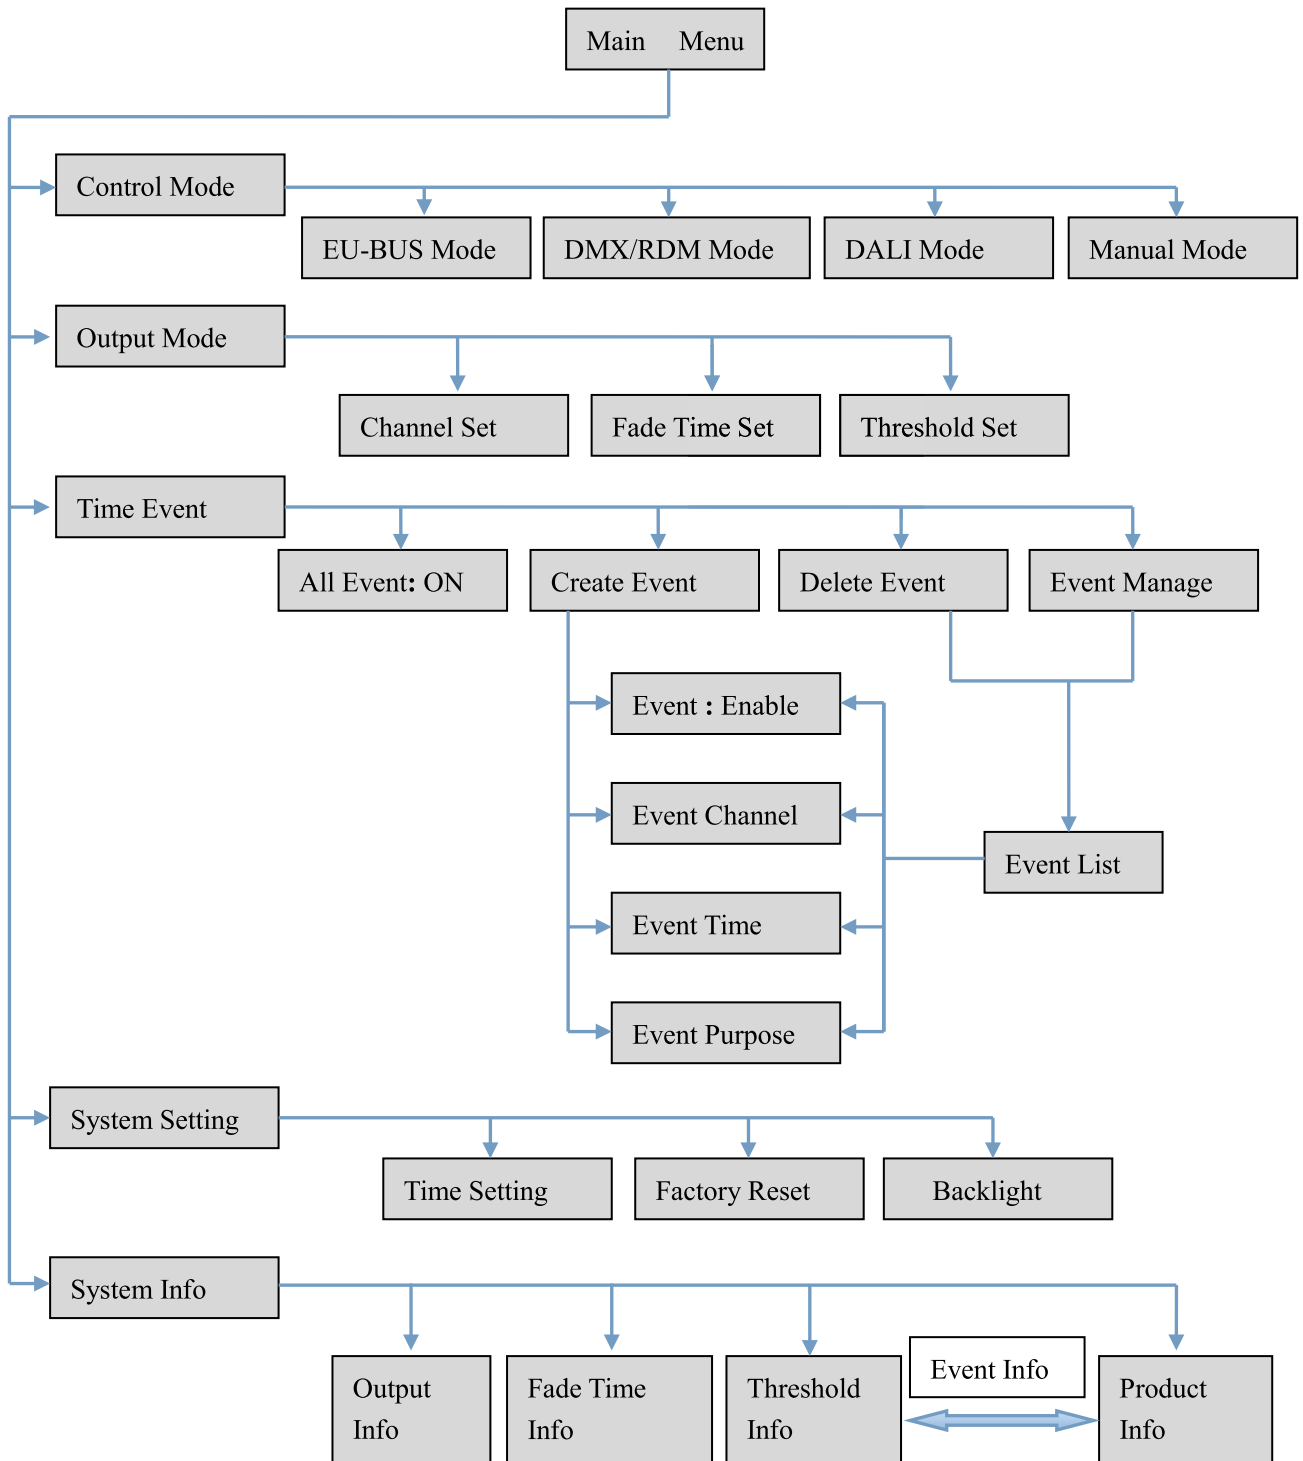

5.1 Control Mode

5.1.1 EU-BUS mode

In the current mode, the output signal is controlled by EU-BUS command, the host computer can scan equipment, assign the box number, read parameters, update the firmware of equipment, achieve group and scene control . The device can operate according to the instruction of the upper computer.

Select the EU-BUS mode, press the “ENTER” can view the device model, the box number, serial number (GUID), press “BACK” to return to the upper menu.




Figure 4

5.1.2 DMX/RDM mode

In the current mode, the output signal is controlled by DMX. Press” ENTER”, then set DMX address for each channel . The X value can be set from 1 to 511. The addresses of 4 channels can be continuous or discontinuous, such as 1, 2, 3, 4, or 1, 5, 8, 9. That is to say, the addresses of the 4 channels are independent, but for any channel, the addresses of AC MOSFET phase cut channel and the corresponding 0-10V DC channel are the same. In addition, the addresses of 4 channels can be the same, so that they can be controlled simultaneously.

When using RDM(2009), the upper computer can scan the device, and assign the address, read the parameters.




Figure 5




Figure 6

5.1.3 DALI mode

The output signal is controlled by the DALI command in this mode. The address of the DALI mode is defined by the system itself and can be modified by the host computer. The addresses of 4 circuits are independent of each other, but the address of AC MOSFET for each circuit is the same as the corresponding 0-10V DC channel.




Figure 7




Figure 8

5.1.4 Manual mode

In the current mode, the output brightness level of 4 channels can be manually set via the button and LCD. The X is brightness of each channel, range of 0-100%.




Figure 9




Figure 10

5.2 Output mode

5.2.1 Channel Set

In the current mode, each channel supports three functions:




Figure 11




Figure 12

- a) Switch : Switch mode, as the power switch, but is invalid for 0-10V signal
- b) LPC: To dim leading edge drivers or devices
- c) TPC: To dim trailing edge drivers or devices

5.2.2 Fade Time Set

In the current mode, you set fade time for each channel. The range is 0-100 (unit:0.1s).




Figure 13




Figure 14

5.2.3 Threshold Set

In the current mode, you can set the switch threshold for each AC MOSFET channel. The corresponding channel of phase cut will switch on output, if received the brightness value \geq threshold set value. The X value range is 0-100%.

Note: For 0-10V channel, this function is invalid.





Figure 15



Figure 16

5.3 Time Event(Only for EUMA0405-DDLT)

The following flow chart will show us how to create a valid event.

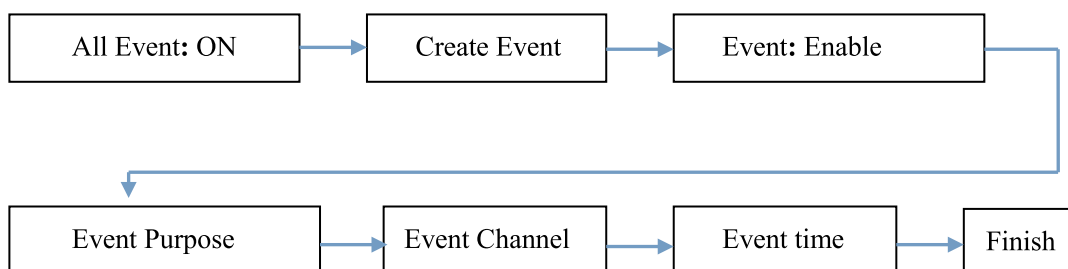

5.3.1 All Event

Set all the events are valid or invalid.




Figure 17




Figure 18

5.3.2 Create Event

Click "ENTER" to create the event, you can set if this event is valid, and the task of the event, the trigger time. Only the event and All event are valid, the task will be triggered at the preset time.

When the event is created, the system automatically names and saves the event, followed by 1,2,3,..... System can save up to 8 events.

Note 1:The System Info will show the event details.

5.3.2.1 Event

Set whether this event is valid. Only All Event and Event are valid, the event will be triggered.




Figure 19




Figure 20

5.3.2.2 Channel Select

Select the channel to be triggered, you can choose one or more channels.




Figure 21




Figure 22

5.3.2.3 Event Time

Set the time to trigger events, including the month, day, week, hour, minute, second.




Figure 23




Figure 24




Figure 25

Note 1:When creating the event, if you forget to set Event Time, then, default the time of creating event as the trigger time.

Note 2: You must set date and week items. Only when both of them are satisfied, the event will be triggered.

5.3.2.4 Event Purpose

Set the event task. In this device, the content of the task is the output brightness, you can set the output brightness of 4 channels separately. The range of brightness is 0-100%




Figure 26




Figure 27

5.3.3 Delete Event

Press "ENTER" to enter the delete event mode, you can cancel the event that has been set up.




Figure 28




Figure 29

5.3.4 Event Manage

Press "ENTER" to enter the event management interface, you can view and modify the event has been set up.




Figure 30




Figure 31

5.4 System Setting

After entering the system settings, you can set the current time, turn on or off the backlight and restore the factory settings.

5.4.1 Time Setting (Only for EUMA0405-DDLT)

You can set the current time. Press "UP" and "DOWN" button to set the time, and press "ENTER" to save, then press "BACK" to exit.




Figure 33




Figure 34

5.4.2 Factory Reset

Press ENTER to choose whether to reset factory settings.




Figure 34




Figure 35

5.4.3 Backlight

EUMA0405-DDL:

When the backlight is set to "ON", the display unattended operation over 60s, LCD will show "EUMA0405". After 60s, LCD will automatically enter the sleep mode, press any key to end the sleep mode, enter the setting state.

EUMA0405-DDLT:

When the backlight is set to "ON", the display unattended operation over 60s, LCD will enter clock mode, show the current time and date. After 60s, LCD will automatically enter the sleep mode, press any key to end the sleep mode, enter the setting state.

When the backlight is set to "OFF", the display will remain the current setting state.




Figure 36




Figure 37

5.5 System Info




Figure 38




Figure 39




Figure 40



Figure 41

In this menu, the current system information can be displayed, which is shown as follows:

- Page 1: control mode and output type
- Page 2: control mode and fade time
- Page 3: control mode and threshold
- Others except the last page: event status and event content
- Last page: product model and the current time

6 Emergency Switch Function

4 channel output, each channel corresponds to a button. If the channel has output, press the button to switch off the 0-10V channel and the corresponding phase cut channel output. If the channel doesn't have output, press the button to switch on the 0-10V and the corresponding phase cut channel output.


7 Wiring Diagram

EUMA0405 dimming module signal port can be connected to EU-BUS network, DMX512/RDM or DALI master, and also can be access to Dynalite system via the Dynalite gateway. This device outputs 4 DC0-10V signal and 4 AC phase cut signal. EUMA0405 device can drive 4 channel DC0-10V dimming power supply and 4 channel phase cut dimming power supply at most.

The maximum current of each channel of 0-10V is 20mA, the maximum number of 0-10V dimming power which can be connected to each channel is determined by signal interface current consumption.

The maximum number of the phase cut dimming power supplies which can be connected to each channel is determined by watts and PF, such as, the power factor of the filament lamp is 1, the max load of each channel is $5 \times 220V \times 1 = 1100$ watts, but at present, the LED lamp is widely used, the PF of led dimmable lamps and dimmable drivers is low, it is recommended that the power of each channel is not more than 800 watts. When the impact

current of phase cut dimmable lamps or drivers is more than 100A, the device may protect themselves and can not start (Impact protection function is provided to avoid broken), the fault information will be shown at LCD. In this situation, please set longer fade time to restart the device slowly.

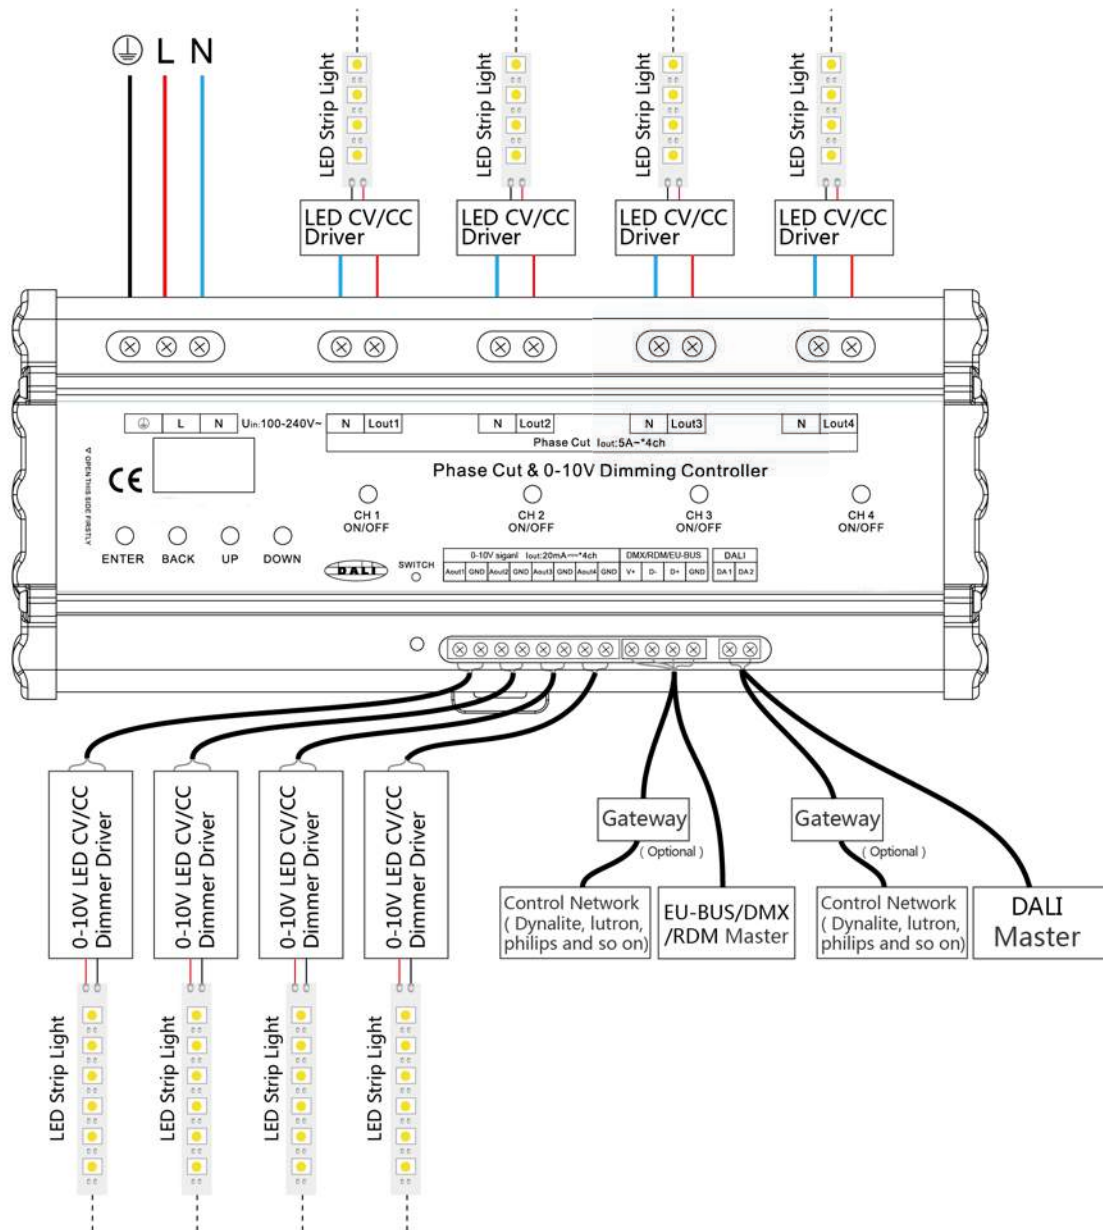

8 Event Case

The following example details the event settings. For example, the phase cut channel 1 output 80% brightness at 8:00pm in April, from Monday to Friday. The setting method is as follows:

1. Set All Event to ON by pressing "ENTER"




Figure 43




Figure 44




Figure 45

2. Enter the Create Event, set Event to Enable by pressing "ENTER".
3. Press "DOWN" to enter Event Channel, select the event channel, then, press "BACK" button to return




Figure 46

4. Enter the Event Time, set the trigger time, then, press “BACK” button to return
 - ◆ Hour,minute,second:20:00:00




Figure 47

- ◆ Weeks :from Monday to Friday




Figure 48




Figure 49

- ◆ Months: April




Figure 50




Figure 51

- ◆ Dates: All




Figure 52




Figure 53

Note: All dates must be selected.

5. After setting up, the system automatically saves and named Event1
6. Enter the Event Manage to check or modify the event settings