

ARPJ-LAPE12700 (8W, 700mA, PFC)

Features:

- Constant current mode power supply
- 100-240VAC input only
- Protections: Short circuit / Over current
- Built-in active PFC function
- Small and compact size




Specification:

OUTPUT	DC VOLTAGE	12V
	DC VOLTAGE RANGE	3-12V
	CURRENT RANGE	700mA \pm 5%
	RATED POWER	8.4W
	RIPPLE & NOISE (max.)	200mVp-p
	VOLTAGE TOLERANCE	\pm 3.0%
	LINE REGULATION	\pm 1.0%
	LOAD REGULATION	\pm 2.0%
	SETUP,RISE TIME	500ms,250ms/230VAC 500ms,250ms/115ac at full load
INPUT	VOLTAGE RANGE	100-240VAC
	FREQUENCY RANGE	47~63Hz
	EFFICIENCY(Typ.)	70% full load
	POWER FACTOR	PF>0.8/230VAC at full load
	AC CURRENT(at full load)	0.2A/100VAC 0.1A/240VAC
	INRUSH CURRENT (max.)	COLD STAT 70A/240VAC 35A/120VAC at full load
	LEAKAGE CURRENT	0.25mA/240VAC
PROTECTION	OVER CURRENT	Above 105% rated output power. Protection type: Hiccup mode, recovers automatically after fault condition is removed.
	OVER TEMPERATURE	Tj 140°C typically (IC1) Detect on main control IC Protection type: Hiccup mode, recovers automatically after temperature goes down
ENVIRONMENT	WORKING TEMP.	-40~+50°C
	WORKING HUMIDITY	20~90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40~80°C, 10~95% RH
	TEMP.COEFFICIENT	\pm 0.03%/°C (0~50°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X,Y,Z axes

SAFETY & EMC	SAFETY STANDARDS	Design refer to UL1310 Class 2,TUV EN60950-1, EN61347-2-13, CAN/CSA C22.2 No. 223-M91, meet IP67
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25~70% RH
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A
DIMENSION		89*39*23mm (L*W*H)

Mechanical Specification:

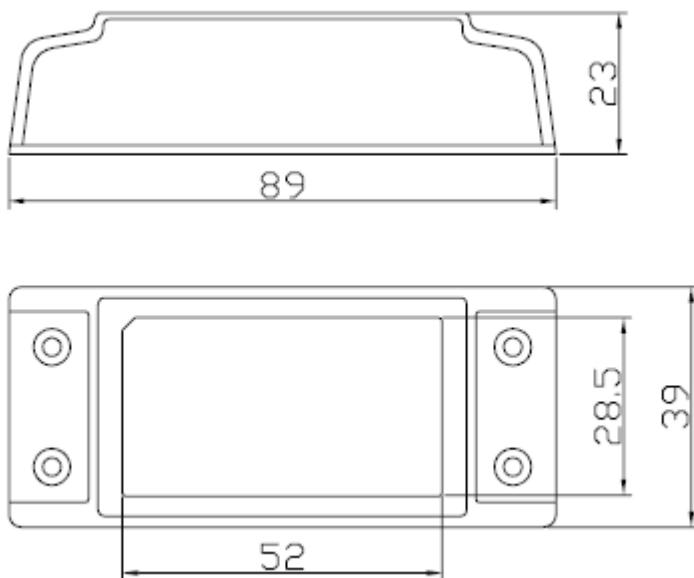

Block Diagram:

