





WALL WASHER Ustrip LED24-FW4839-W40-24V-48W-IP67



Dimensions

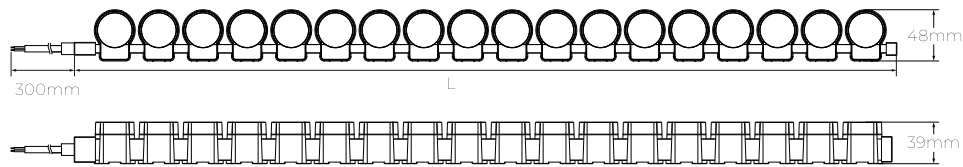

Basic Parameters



Light Distribution Curve
(24V, 10W, 4000K)

Working Voltage	DC24V
CRI	>80
Rated Power/m	48w
Ambient Temperature	-25°C~+45°C
Storage Temperature	-25°C~+60°C
Beam Angle(50%)	10°/24°/36°/60°/10°*30°/10°*60°
Max.run Length	3.5m
Control Mode	PWM/DMX512



Single Color	
Voltage	DC24 V
Circuit Design	CV/CC
Power(w/m)	48W
Max. Run Length(CC)	3.5m
Cutting Length	250mm

Parameters				
CRI	CCT	lm/m	w/m	lm/w
>80	1800K	2312	48	48.1
	2200K	2270	48	47.2
	2700K	2787	48	58.0
	3000K	3165	48	65.9
	4000K	3339	48	69.5
	5000K	3582	48	74.6
--	6500K	3442	48	71.7
	Red	1891	48	39.3
	Green	3376	48	70.3
	Blue	978	48	20.3



Digital DMX512	
Voltage	DC24 V
IC Model	SM18522PH
Power(w/m)	48W
Pixel(PCS)	4
Cutting Length	250mm

Parameters				
CRI	CCT	lm/m	w/m	lm/w
>80	R	389	12	32.4
	G	1010	12	84.1
	B	296	12	24.6
	W(3000K)	789	12	65.7
	RGBW	2391	48	49.8



End Cap & Cable Lead Option

