

**Прожектор WW2009 White 220V (12x1W, 480mm)**  
**Прожектор WW2008 White 220V (24x1W, 880mm)**



**Product Introduction:**

This Wall Washers adopt 3W high Power LED as light source, With the following merits: stalbe quality, energy-saving, high light efficiency, beautiful color and high brightness. It can be lighen up directly with high voltage input(90-264v AC), without any controlling system inside.

**Application:**


Widely used for indoor and outdoor lighting and decoration, such as stage, meeting room, exhibition lighting, ancient buildings and cultural plaza and other places.

**Technical parameters:**


Item	WW2008 White	WW2009 White
Light source	1w LED(different colors available)	
	24LED	12LED
Input voltage	AC90~260V	
Working voltage	DC15V	
Maximum power	28Watts	14.3Watts
LEDcurrent	350 mA	
Beam angle	50°	50°
Luminous Flux (LM)	1326 lm	663 lm
Projecting Distance	20 meters	
Temperature for working	-20°C ~ +45°C	
IP Rank	IP65	
Net Weight	3.7kg	2kg

**Dimention(unit: mm):**

- WW2008 800mm wall washer:

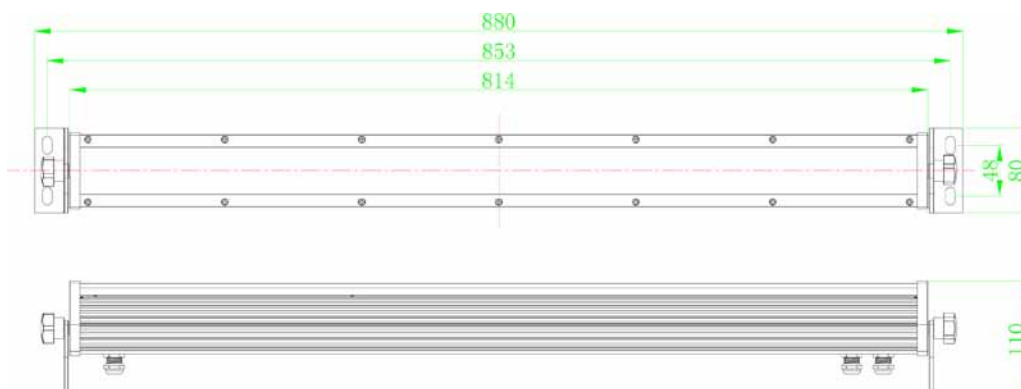

- WW2009 400mm wall washer:

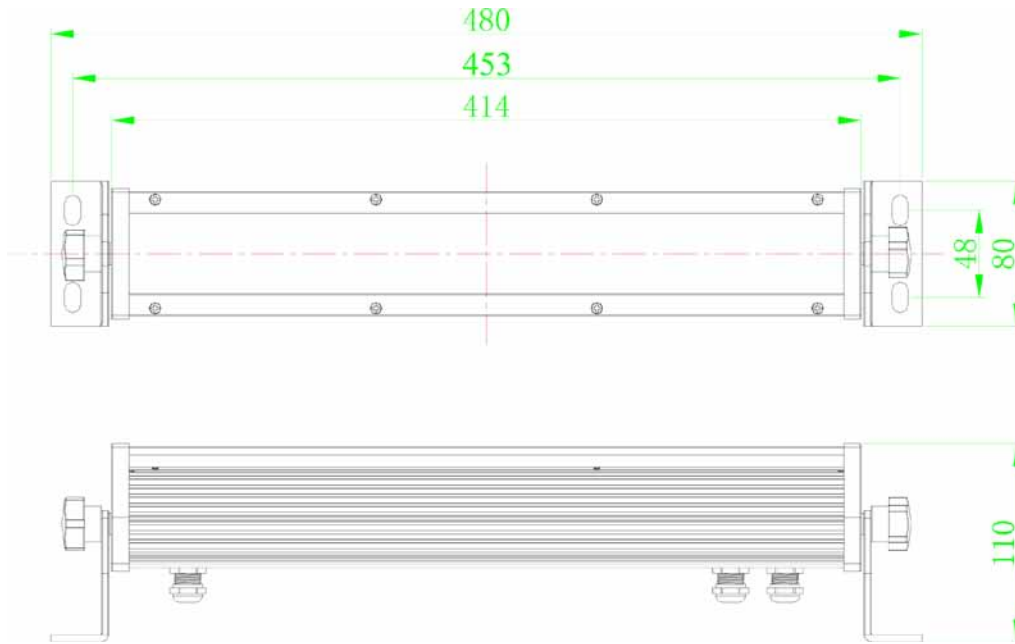

### Connector:

3-pin male waterproof connector for power input

### Accessories:

Bracket	2 pc
Rotary Handle	2 pc
Product instruction	1 copy

### Attention:



The wall washer can be used both indoor and outdoor.

### Alarm:

1. Do not turn on the power when products in packing box.
2. Make sure the setting grounding and power off before use.
3. Replace the protect cover if any broken.
4. Fire prevention, high voltage prevention, quakeproof.
5. Please reading careful and keep this instruction before installation.

### Note:

1. Caustic or deliquescent chemical medicine will damage the protection of shell.
2. Suggest wroking temperature of  $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$ . If beyond this temperature range, will affect the lifetime of the light. Storage temperature:  $-35 \sim +70^{\circ}\text{C}$
3. We are not liable for any aftereffect of use the part which is not ILLUSION products.