


210W Single Output Certified Power Supply

- AC Input Range Selectable By Switch
- EMI Meets EN55022(CISPR22) Class B
- Low Power Consumption
- Approvals: UL / CUL / CE
- Protections: Over Load / Over Voltage / Over Temp./ Short C.
- 100% Full Load High Temperature Burn-in Test



Input Voltage Range	88~132VAC/ 176~264VAC Selectable By Switch
Input Frequency	47-63Hz
Inrush Current	Cold Start, 25A/ 115VAC, 50A/ 230VAC
Output Adjustment Range	±10% Rated Output Voltage
Line Regulation	≤0.5%
Output Over Load Protection	105%~150% Hiccup Mode, Auto-recovery
Output Over Voltage Protection	115%~145% Rated Output Voltage
Output Short Circuit Protection	Hiccup Mode, Auto-recovery
Rise, Hold Up Time	50mS, 20mS at Full Load (Typical)
Hi-pot Isolation	I/P-O/P: 3KVAC, I/P-FG: 1.5KVAC, O/P-FG: 0.5KVAC
Operating Temperature Range	-10℃ to +40℃@100%, -20℃@80%, +60℃@60% Load
Storage Temperature Range	-40℃ to +85℃, 0 to 95%RH (Non-Condensing)
Safety Standards	UL60950-1
EMC standards	EN55022 class B, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11,ENV50204
Cooling Method	Free Air Cooling Convection
Weight	0.95Kgs/pcs

Product model	DC output	Load regul.	R&N	Efficiency
HTS-210F-5	5V, 0~40A	1%	75mV	79%
HTS-210F-7.5	7.5V, 0~27A	1%	100mV	82%
HTS-210F-12	12V, 0~17A	0.5%	120mV	83%
HTS-210F-13.5	13.5V, 0~15A	0.5%	120mV	84%
HTS-210F-15	15V, 0~14A	0.5%	120mV	85%
HTS-210F-24	24V, 0~8.8A	0.5%	150mV	87%
HTS-210F-27	27V, 0~7.8A	0.5%	150mV	87%
HTS-210F-36	36V, 0~5.8A	0.5%	200mV	88%
HTS-210F-48	48V, 0~4.4A	0.5%	200mV	88%

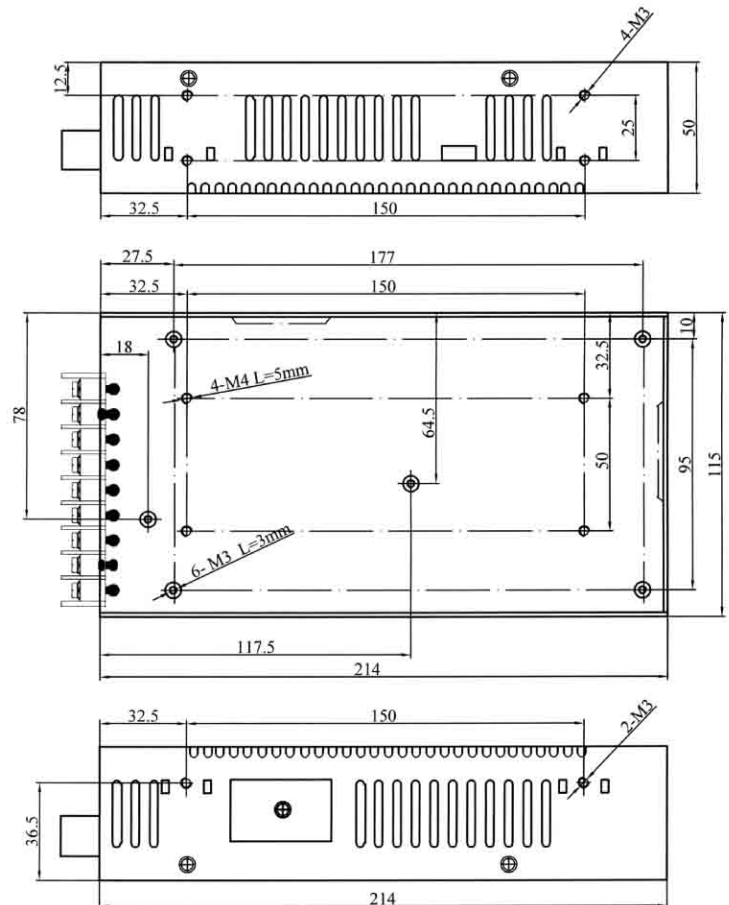

notes:

1. All dimensions in mm.
2. Tolerance (except cable length): xx = ±0.04
xxx = ±0.010