

Диммер DALI-350

Highlights:


- Constant Current 350mA PWM Output
- DALI digital control input, dimming control LED modules
- Addressable output channels
- Dimming range from 0-100%, LED start at 1% possible
- Suitable for DC supply
- Over temperature protection
- Safety class 2
- Approved For Lamps:1W X 1~12LED

Technical Data:

Parameter	Min*	Nom*	Max	Unit
Input Voltage Range	90	120	240	Vac
Input Frequency	47	50-60	63	Hz
Input Current@120VAC	-	200	-	mA
Power Factor@120VAC	-	0.85	-	
Output Power(1 Channel Pout Total)	0.7	2x 1-12	2x13	W
Output Voltage	2	3-40	41	Vdc
Output Current	315	350	380	mA
Peak Current	-	<500	-	mA
Dimming Control (Dimmer)	IEC62386			
Case Temp.	-	-	80	°C
Ambient Temp.	-25	-	50	°C
Protection				
Short Circuit Protection				
Overload Protection				
Over Heat Protection				

*Valid at ambient temperature of 25°C

Dimensions(mm):

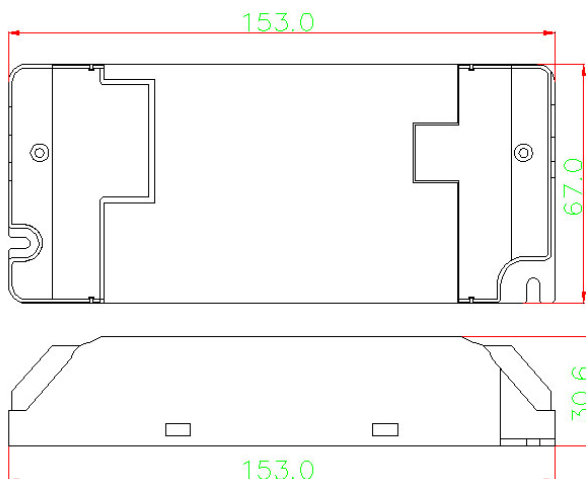

Wiring Diagram:

