


Features


- Dimming interface: sensor switch
- Match with a variety of induction sensor head optional
- 12-24VDC Input
- 6 channel synchronous constant voltage output, Max. total output power 60W
- Ultra-thin design, light weight and high efficiency
- Suitable for indoor LED lighting application
- 5 Year, 50,000hr warranty



Applications

• Suitable for cabinet LED strip.


Mechanical Structures and Installations

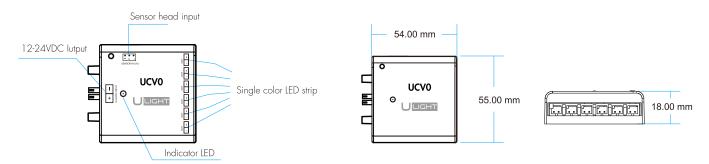


a010126

Wiring Diagram

1. Use alone, powered by switching power supply, with or without sensor head

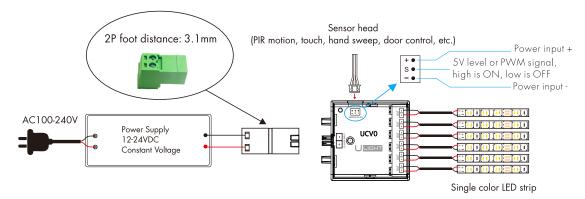

2. Matching cabinet LED driver use, with or without sensor head

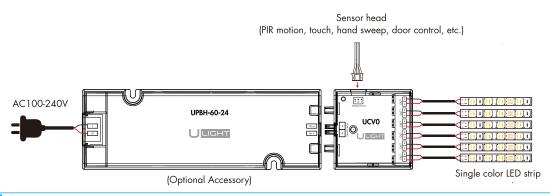



Failure analysis and troubleshooting

Fault	Cause	Solution
The light can not be turned on	1. No power 2. Wrong wiring	Check the power supply Connection test
Hiccup flashing	Overload	Check the power of the light

Packing List







User Manual 1 pcs



2PTerminal 1 pcs



1 pcs

ULIGHT