


ARPV-24040 (24V, 1,67A, 40W)

Model:	ARPV-24040	Technologic Data
Certificate		
Based on:		IEC 61347
Input	Rated voltage:	AC170～250V
	Frequency:	50～60Hz
	Input power>Loading):	≤50W
Output	Output current (Loading):	DC1.6A
	Output voltage (loading):	DC 24±0.5V
	Output voltage(no loading):	DC 24±0.5V
	Short-circuits protect:	output shorted 3 seconds, and will work normally after separated.
	Over loading:	Protection
Voltage resistance	Input-Output	AC 1.5KV/5mA 1Min
	Input-Housing	AC 1.5KV/5mA 1Min
Non-function	External appearance	1.The surface has no dirty vestige, rowing the , the wreath oxygen, transform 2.Power cable and the label paper to should 3.The date print clear
	Mark	The product label is right clear, neat, have no folding line
	Other	Whether manual and other related data are well-found or not
ripple		≤600MVpp (120Hz)
To an electric voltage		≤10Vac
Protection grade		IP67
Working Temperature		-25℃～+40℃

Feature testing

Testing Contents		Testing Qty				
Input voltage:		AC220V				
Testing Qty		1	2	3	4	5
Input power(Loading current 1.6A)		45.6W	45.7W			
Output voltage(Loading current 1.6 A)		23.8V	23.7V			
Output voltage(Loading current 0A)		24.0V	24.0V			
High low pressure start		OK	OK			
Short-circuit:		OK	OK			
Bear the electric voltage	Input—Output:	OK	OK			
	Input— Housing:	OK	OK			
Over loading:		OK	OK			
Efficiency		83.5%	83%			
Verdict:		Pass				

Housing Size (mm): L222×W29×H20

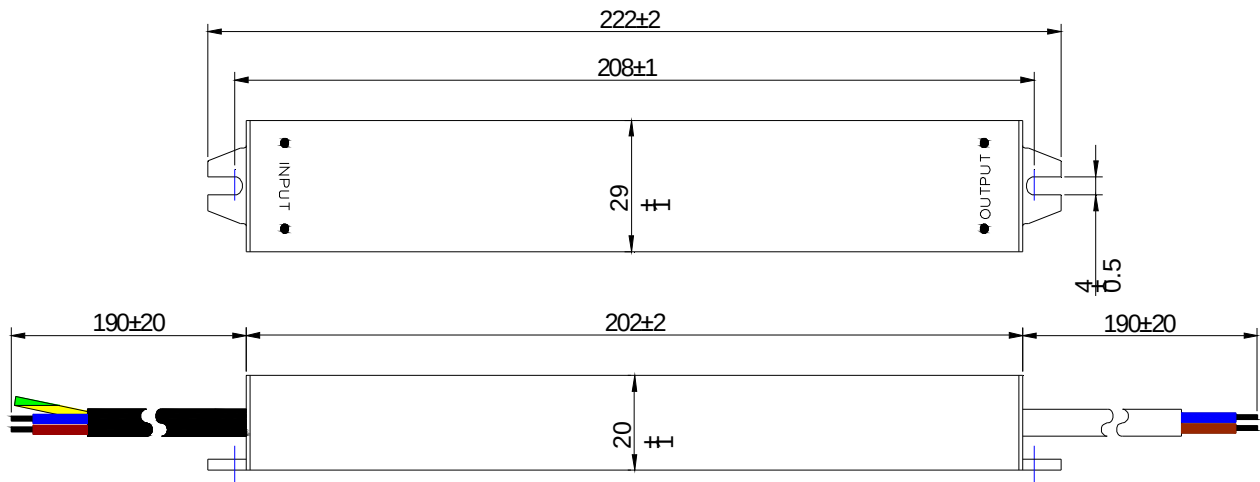

Housing Material: AL

Cable Model of input : VDE H03VV-F 3G0.75mm² /black

Cable Model of output: VDE H03VV-F 2*0.75mm² /white

Packing Size /Qty: 325×260×200 mm/50PCS

