

## ARPJ-DIM601050-R (63W, 1050mA, 0-10V, PFC)



### FEATURES:


- 3 Optional dimming(0-10V / PWM / Resistance)
- Universal AC input/Full range(100-260VAC)
- Protections: Short circuit / Overload / Over voltage/ Over temperature
- Built\_in active PFC function
- Fully encapsulated with IP65 level
- UL60950 Class 2 power unit, pass LPS
- Cooling by free air convection
- 100% full load burn-in test
- High reliability
- Suitable for LED lighting and moving sign applications
- Compliance toworldwide safety regulations for lighting
- Damp / wet location outdoor application
- 2 years warranty

### PARAMETERS:

OUTPUT	DC VOLTAGE	60V
	RATED CURRENT	1050mA
	CONSTANT CURRENT REGION	30~60V
	RATED POWER	63W
	RIPPLE&NOISE(MAX)	150mVp-p
	CURRENT RIPPLE	<1%
	LINE REGULATION	±1%
	LOAD REGULATION	±2%
	SETUP,RISE TIME	1000ms, 80ms / 230VAC 1000ms, 80ms / 115VAC at full load
	HOLD UP TIME(Typ.)	60ms / 230VAC 30ms / 115VAC at full load
INPUT	VOLTAGE RANGE	100-240VAC
	FREQUENCY RANGE	47~63Hz
	POWER FACTOR	PF>0.95/230VAC PF>0.99/115VAC at full load PF≥0.9 at 75 ~ 100% load, 115VAC / 230VAC
	EFFICIENCY(Typ)	89%
	AC CURRENT	0.65A / 115VAC      0.35A / 230VAC
	INRUSH CURRENT(MAX)	Cold-start current 65A/230V
	LEAKAGE CURRENT	<2mA/240VAC
PROTECTION	OVER CURRENT	95-108% Protection type: Hiccup model,recovers automatically after fault condition is removed
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed
	OVER VOLTAGE	75~90V Protection type : Shut down o/p voltage, re-power on to recover
	OVER TEMPERATURE	Tj 140°C typically(IC1) Detect on main control IC
		Protection type : Shut down o/p voltage, recovers automatically after temperature goes down


ENVIRONMENT	WORKING TEMP.	-30°C ~ +60°C @ full load ; +90°C @ 60% load
	WORKING HUMIDITY	20% ~ 95%RH non-condensing
	STORAGE TMP.,HUMIDITY	-40°C ~ +80°C, 10-95%RH
	TEMP.COEFFICIENT	±0.03%/°C(0-50°C)
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
SAFETY EMC	SAFETY STANDARDS	Design refer to UL1310 Class 2,TUV EN60950-1, EN61347-2-13, CAN/CSA C22.2 No. 223-M91, meet IP65
	WITHSTAND VOLTAGE	I/P-O/P:3.0KVAC (I/P-FG:1.5KVAC)
	ISOLATION RESISTANCE	I/P-O/PI: > 100M Ohms/500VDC/25~70%RH
	EMI CONDUCTION & RADIATION	Compliance to EN55015, EN55022 (CISPR22) Class B
	HARMONIC CURRENT	Compliance to EN61000-3-2 Class C ( ≥75% load) ; EN61000-3-3
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, EN61547, light industry level , criteria A
OTHERS	MTBF	≥400K Hours (25°C)
	DIMENSION	168*44*34mm (L*W*H))

## MECHANICAL SPECIFICATION:

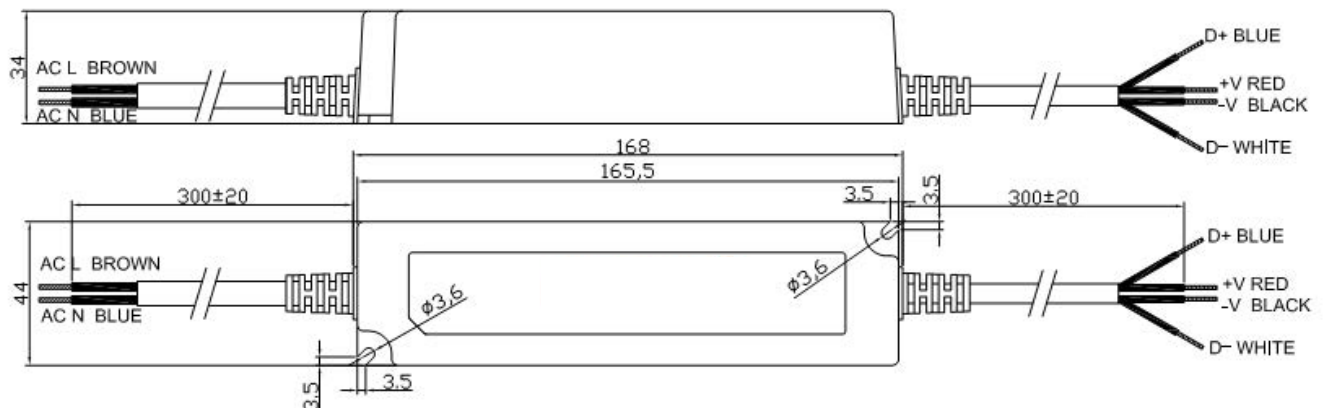


**Note:** AC Input line can be increased FG (GREEN & YELLOW) line

## BLOCK DIAGRAM

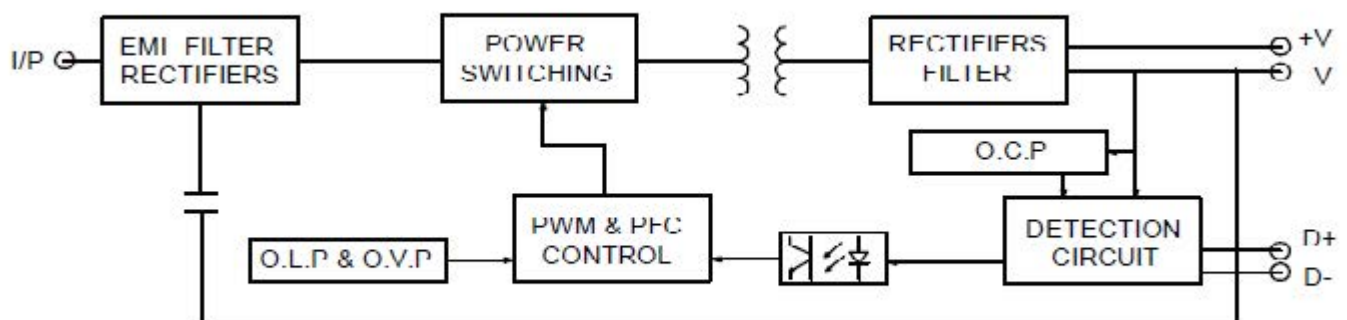


## CHARACTERISTIC DIAGRAM:


### • LOAD & TEMPERATURE FEATURE

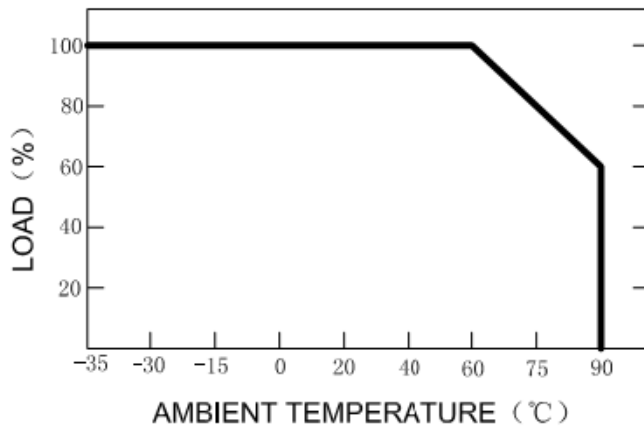


### • LOAD & AC INPUT VOLTAGE

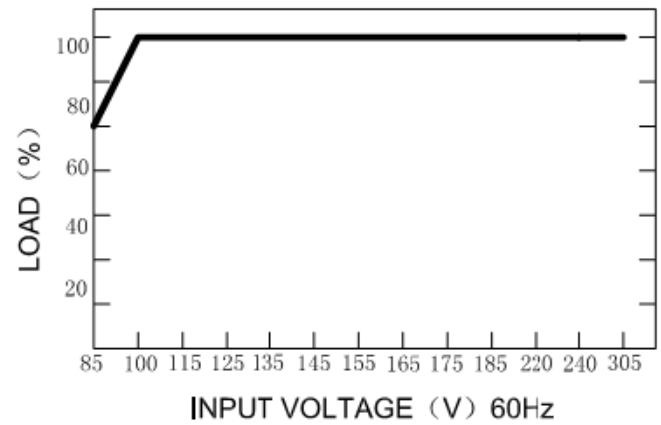


### • LOAD & POWER FACTOR

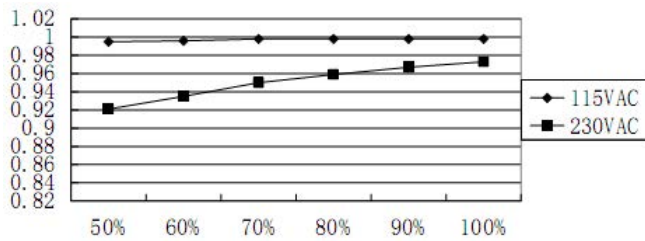

### • LOAD & EFFICIENCY

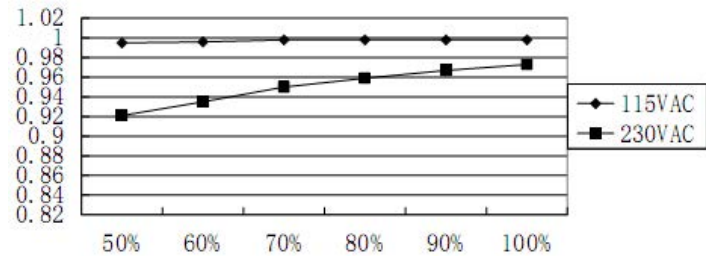

## DIMMER OPERATION:

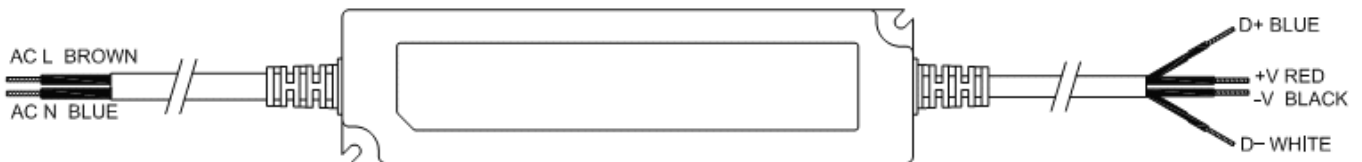

**Note:** Connected a resistor or 10V PWM signal between D+ and D- ,LED. Driver can output constant current.

Adjust the value of the resistance value (Typical value)

Resistor value	10kΩ	20kΩ	30kΩ	40kΩ	50kΩ	60kΩ	70kΩ	80kΩ	90kΩ	100kΩ	Open
LED current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%

10V PWM signal (Typical value)

Frequency range: >100Hz

PWM signal	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Open
LED current	100%	90%	80%	70%	60%	50%	40%	30%	20%	10%	0%	100%